

**High pressure washdown,**

Suitable for a wide variety of industrial applications, streamlined, comfortable design.

Materials:

Forged brass housing, moulded plastic casing, stainless steel valve arrangement, special heat and chemical resistant seals for optimum performance even in the harshest environments.


**Max working pressure :** 275 bar (4000 psi).

**Max temperature:** 300° F (135° C).

**Max flow rate:** 10.5 GPM.

Inlet thread 3/8" BSP female.

Part No: NO-004-5SS

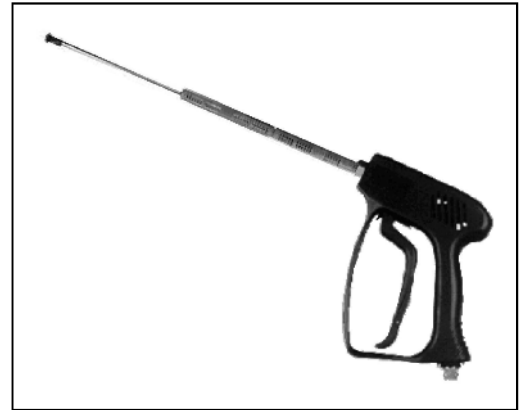

**Low pressure washdown - Watergun.**

Flow controlled by rear trigger action, partial depression for spray, full depression for jet. Automatic shut off on trigger release.

Materials:

Gunmetal construction with scuff resistant black rubber shroud.

**Max working pressure :** 27.5 bar (400 psi).

**Max flow rate on spray:** 12 GPM

Inlet thread 1/2" NPT fem.

Part No: NO-016-4G2



**Low pressure washdown - Diffuser Nozzle.**

Adjustable twist action through spray, straight-stream and shut off.

Material: Gunmetal

**Max working pressure :** 15 bar (217 psi).

**Flow rate on spray:** 36 GPM.

**Flow rate on jet:** 38 GPM.

Inlet thread 1.1/4" BSPP fem.

Part No: NO-020-6G1

