


AT20S Compressed Air

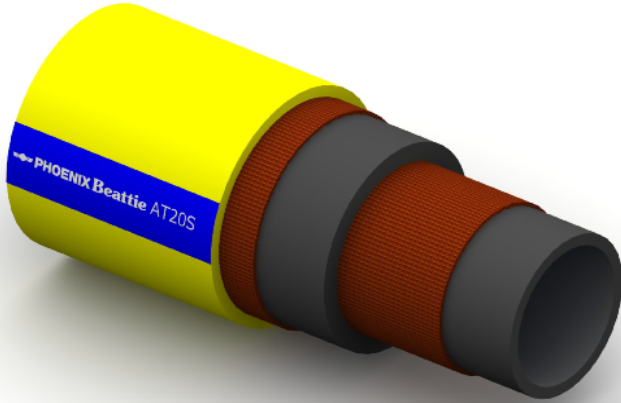

Construction:

Tube: Black NBR; Oil Mist Resistant.

Reinforcement: High Tensile Textile Cords.

Cover: Yellow NBR; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Compressed Air, Designed for Heavy Duty Applications.

Branding: **PHOENIX Beattie AT20S AIR WP 20 BAR**
White Text on a Blue Stripe

| Part No | Inside Dia | | O.D. | Working Pressure | | Minimum Burst Pressure | | Min Bend Rad | Weight |
|-----------|------------|-------|------|------------------|-----|------------------------|-----|--------------|--------|
| | mm | Inch | | mm | Bar | PSI | Bar | | |
| AT20S-006 | 10 | 3/8 | 19 | 20 | 300 | 60 | 900 | 60 | 0.23 |
| AT20S-008 | 13 | 1/2 | 23 | 20 | 300 | 60 | 900 | 78 | 0.39 |
| AT20S-012 | 19 | 3/4 | 30 | 20 | 300 | 60 | 900 | 114 | 0.64 |
| AT20S-016 | 25 | 1 | 37 | 20 | 300 | 60 | 900 | 150 | 0.80 |
| AT20S-024 | 38 | 1.1/2 | 52 | 20 | 300 | 60 | 900 | 228 | 1.37 |
| AT20S-032 | 51 | 2 | 67 | 20 | 300 | 60 | 900 | 306 | 2.09 |