


PW10S Potable Water Delivery

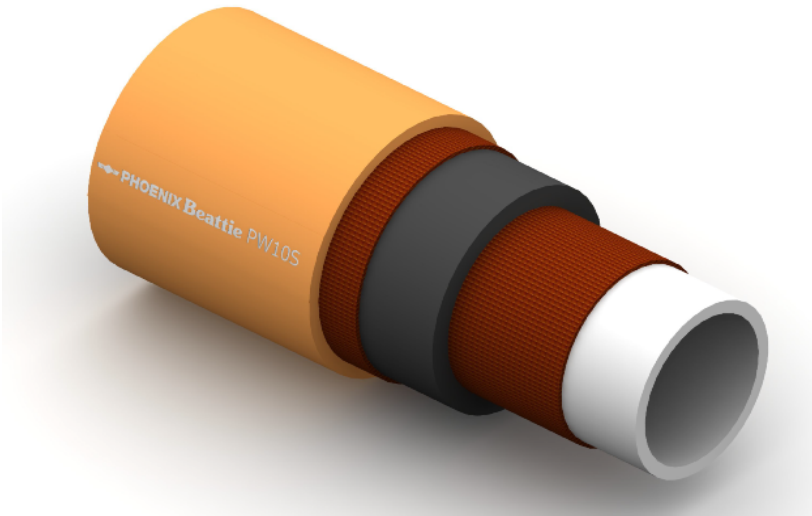

Construction:

Tube: White NR.

Reinforcement: High Tensile Textile Cords.

Cover: Orange CR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -30°C To +100°C.

Typical Application: Potable Water Transfer

Branding:  **PHOENIX Beattie PW10S POTABLE WATER DELIVERY WP 10 BAR**
White Text.

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
PW10S-048	76	3	92	10	150	40	600	456	3.20
PW10S-064	102	4	119	10	150	40	600	612	4.20
PW10S-080	127	5	145	10	150	40	600	762	5.40