


PW20S Potable Water Delivery

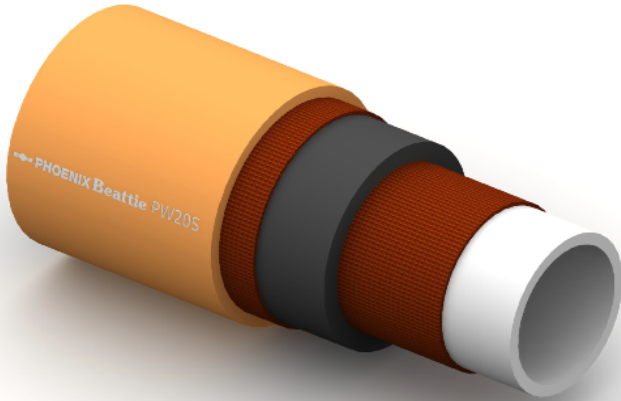

Construction:

Tube: White NR.

Reinforcement: High Tensile Textile Cords.

Cover: Orange CR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -35°C To +100°C.

Typical Application: Potable Water Transfer

Branding:  **PHOENIX Beattie PW20S POTABLE WATER DELIVERY WP 20 BAR**
White Text.

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
PW20S-008	13	½	23	20	300	80	1200	78	0.38
PW20S-012	19	¾	31	20	300	80	1200	115	0.62
PW20S-016	25	1	37	20	300	80	1200	150	0.77
PW20S-024	38	1½	50	20	300	80	1200	228	1.11
PW20S-032	51	2	68	20	300	80	1200	306	1.90