


UP16H Acid and Chemical Suction and Delivery

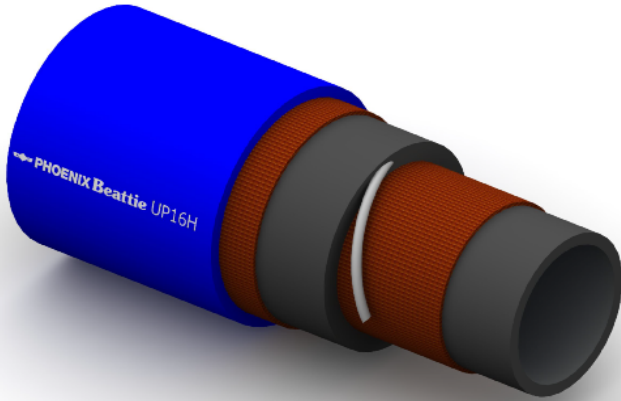

Construction:

Tube: Transparent UHMWPE (Ultra High Molecule Weight Polyethylene). FDA approved

Reinforcement: High Tensile Textile Cords with Embedded Helix Wire.

Cover: Blue EPDM; Abrasion and Ozone Resistant.

Temperature Range: -40°C To +80°C.

Typical Application: Acid and Chemical suction and delivery suitable for 98% of existing Chemicals.

Branding: **PHOENIX Beattie UP16H CHEMICAL SUCTION & DELIVERY WP 16 BAR**
White Text.

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
UP16H-016	25	1	37	16	232	64	928	150	0.72
UP16H-024	38	1½	51	16	232	64	928	225	1.20
UP16H-032	51	2	67	16	232	64	928	275	2.04
UP16H-048	76	3	92	16	232	64	928	380	2.88
UP16H-064	102	4	124	16	232	64	928	510	3.81