


XL16H Chemical Suction and Delivery

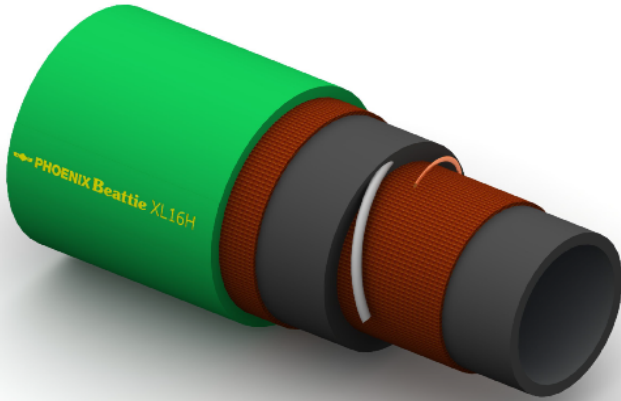

Construction:

Tube: Translucent XLPE.

Reinforcement: High Tensile Textile Cord with Embedded Steel Helix Wire and Anti Static Wire.

Cover: Green EPDM; Abrasion, Ozone and Weather Resistant.

Temperature Range: -30°C To +65°C.

Typical Application: Acid and Chemical suction and delivery suitable for 98% of existing Chemicals.

Branding: **PHOENIX Beattie XL16H CHEMICAL SUCTION & DELIVERY WP 16 BAR**
Yellow Text.

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
XL12H-012	19	¾	31	16	232	64	928	127	0.65
XL12H-016	25	1	37	16	232	64	928	152	0.80
XL12H-024	38	1½	51	16	232	64	928	305	1.14
XL12H-032	51	2	67	16	232	64	928	381	1.71
XL12H-048	76	3	91	16	232	64	928	660	2.67
XL12H-064	102	4	124	16	232	64	928	864	3.62